

# Document Scanners

## ScanSnap S1500M



**ScanSnap**  
Color Image Scanner



**ScanSnap**  
Color Image Scanner  
S1500M





- Compact, easy to use 'one touch' scanner
- Make your Documents more Mobile
- Scan to a range of popular Cloud services
- Automated features for effortless scanning
- Scan from business card to A3
- Scan to iPad®/iPhone®, Android™, Word, Excel, E-mail and SharePoint amongst others



shaping tomorrow with you

**FUJITSU**

# ScanSnap S1500M

<b>S1500M</b>	<b>50 Sheets</b>	<b>600 dpi</b>	<b>Simplex 20 ppm</b>	<b>Duplex 40 ipm</b>
				

## Easily digitises various document types




## “Total support” from digitisation through to application

### Simple, Speedy & Compact!

#### Easily digitises paper based data with the touch of one button

The S1500M facilitates simple PDF generation with the following one touch activated automatic settings and automatic image correction functions:

#### • Blank page detection

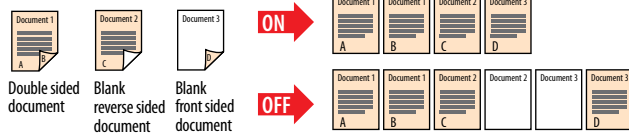


#### • Auto deskew and auto orientation




#### • Auto-size detection



#### • Automatic resolution function





#### • Intelligent auto colour detection



### Speedy

Just place a document in the scanner’s paper chute, press the “scan” button, and the S1500M starts scanning right away. Furthermore, the S1500M is able to simultaneously scan up to 50 two-sided pages at a speedy 20 pages per minute.

### Scans everything from business cards to A3 sized documents

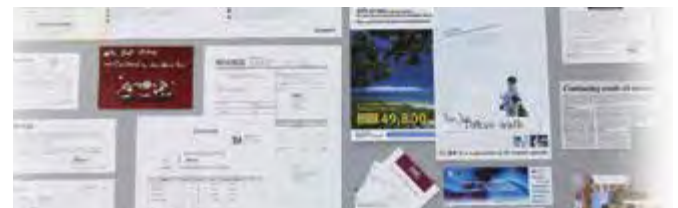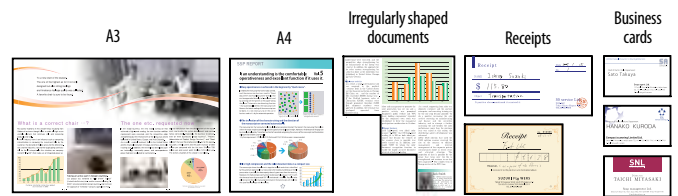


#### ScanSnap Carrier Sheets

Use of a carrier sheet enables S1500M users to digitise larger documents (A3/B4), as well as magazine and newspaper clippings and photographs. Such document containing carrier sheets can be scanned successively or mixed in with regular paper documents.

### S1500M’s “Quick Menu” facilitates speedy flexible use

Users just choose what they want to do from the Quick Menu, which appears after a document has been scanned. S1500M’s Quick Menu is perfect for everyone, even the complete novice!


#### • Quick Menu for Mac OS Users

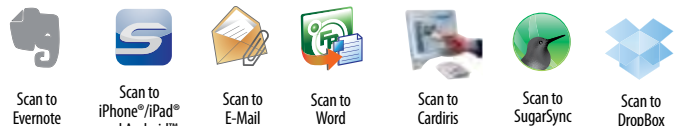

Document received >>

Document scanned >>

Now make your paper productive >>

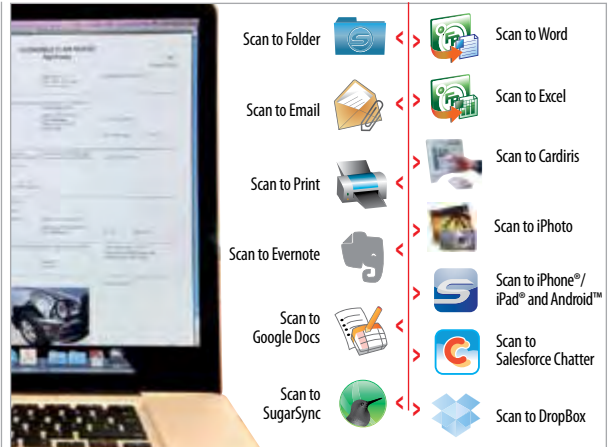

### Generates Microsoft® Word and Excel files

Editable images can be created by scanning directly to Microsoft® Word and Excel files\*.

\*Generated images and text may vary from the original

Top-class OCR engine

**Bundled** **ABBYY FineReader for ScanSnap™ 4.1 Mac Edition**

### Generates editable PDF files

- Comes bundled with Adobe® Acrobat® 9 Professional, which enables users to move beyond merely “seeing” and “printing” generated data, to editing generated PDF files however they like
- Generates password and digital ID attached PDF files that are ideal for safeguarding personal information and other confidential information that needs to be protected

Perfect for everything from PDF creation to application

**Bundled** **ADOBE ACROBAT 9 PROFESSIONAL**

### Seamless linking to Cloud services

The ScanSnap series scanners come with a standard array of functions for near effortless scanning to Evernote, Google Docs, Salesforce, SugarSync and Dropbox.

#### ScanSnap welcomes Dropbox®

Dropbox is a free service that lets you bring all your photos, docs and videos anywhere. This means that any file you save to your Dropbox will automatically save to all your computers, phones and even the Dropbox website.

With more cloud services to choose from, ScanSnap customers are sure to find the right application for their documents.

\*Current ScanSnap S1500M users can add any newly enhanced software functions free of charge, please visit <http://emea.fujitsu.com/ScanSnapSupport> for a variety of options

### Efficiently organises business card information


- Scans large volumes of business cards into digital business card holders
- Enables users to enter scanned business card data into Address Book and other databases for future reference



Business card scanning software

**Bundled** **Cardiris™ 4.0 for ScanSnap**

### Scans to a greater range of mobile devices

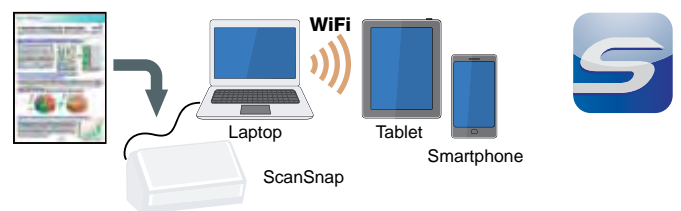

Like all scanners of the ScanSnap series, the S1500M supports wireless scanning to iPad® and iPhone® devices for convenient mobile viewing via the mobile app ScanSnap Connect Application\*, which now comes in a version for Android™ smartphones and tablets.

\* ScanSnap Connect Application is available as a free download from the official application distribution service of the device (e.g., Google Play and Apple App Store). The Wi-Fi of the ScanSnap installed computer must be turned on to use this feature.

# ScanSnap S1500M Specifications



ENERGY STAR® compliant

<b>Product name</b>	<b>ScanSnap S1500M</b>	
<b>Scanner type</b>	ADF (Automatic Document Feeder), Duplex colour scanning	
<b>Scanning modes</b>	Colour, grayscale, monochrome, automatic (colour / grayscale / monochrome detection)	
<b>Image sensor</b>	Colour CCD (Charge-coupled device) x 2 (front x 1, back x 1)	
<b>Light source</b>	White cold cathode discharge lamp	
<b>Optical resolution</b>	600 dpi	
<b>Scanning speed<sup>11</sup></b> (A4 portrait)	Auto Mode <sup>12</sup>	Simplex or Duplex, 20 pages per minute
	Normal mode	Colour & Grayscale 150 dpi, Monochrome 300 dpi, Simplex / Duplex, 20 ppm
	Better mode	Colour & Grayscale 200 dpi, Monochrome 400 dpi, Simplex / Duplex, 20 ppm
	Best mode	Colour & Grayscale 300 dpi, Monochrome 600 dpi, Simplex / Duplex, 20 ppm
	Excellent mode	Colour & Grayscale 600 dpi, Monochrome 1200 dpi, Simplex / Duplex, 5 ppm
<b>Document size</b>	Normal Mode without Carrier Sheet	A4, A5, A6, B5, B6, Business Card, Postcard, Letter, Legal and Custom Size. Max: 216 x 360mm, Min: 50.8 x 50.8mm, Automatically recognizes document size.
	Normal Mode with Carrier Sheet	Use of a Carrier Sheet permits the scanning of A3, B4, Double-Letter and photographs as well as the document sizes listed above
	Long Paper Scanning <sup>13</sup>	863 mm in length
<b>Paper weight (Thickness)</b>	52 to 127 g/m <sup>2</sup>	
<b>Paper chute capacity<sup>14</sup></b>	Maximum 50 sheets (A4 size at 80 g/m <sup>2</sup> )	
<b>Interface</b>	USB 2.0 (USB 1.1 Compatible)	
<b>Power requirement</b>	AC Adapter AC 100V to 240V, 50 / 60 Hz	
<b>Power consumption</b>	Operating: 35W or less / Sleep mode: Less than 4.5W	
<b>Operation environment</b>	Temperature 41°F to 95°F (5°C to 35°C) / Relative humidity 20 to 80% (non-condensing)	
<b>Dimensions (W x D x H)<sup>15</sup></b>	292 x 159 x 158 mm	
<b>Device weight</b>	3kg	
<b>Environmental compliance</b>	ENERGY STAR® compliant / RoHS <sup>16</sup>	
<b>Driver</b>	ScanSnap specific driver (Does not support TWAIN / ISIS <sup>17</sup> ) operable with ScanSnap Manager V3.0	

- <sup>11</sup> Scanning speeds may vary due to the system environment used.
- <sup>12</sup> Documents measuring approximately 148 mm in length or less are scanned in "Best mode", while other documents are scanned in "Better mode".
- <sup>13</sup> ScanSnap S1500M is capable of scanning documents that exceed A4 size in length. It supports the scanning of longer documents in all modes, except for "Excellent mode".
- <sup>14</sup> Maximum capacity varies, depending upon paper weight.
- <sup>15</sup> Excluding the stacker and other external attachments.
- <sup>16</sup> PFU LIMITED, a Fujitsu company, has determined that this product meets RoHS requirements (2002 / 95 / EC).

<b>Software</b>	<b>Mac OS</b>	
<b>Driver<sup>1</sup></b>	ScanSnap Manager V3.2 Cardiris™ 4.0 for ScanSnap	
<b>Software Applications</b>	Adobe® Acrobat® 9 Professional	
	ABBYY FineReader for ScanSnap™ 4.1	
	Evernote for Mac 2.2	

<sup>17</sup> TWAIN or ISIS™ applications cannot be used directly.

<b>System requirements for Mac OS</b>		<b>Mac OS X v10.7</b>	<b>Mac OS X v10.6<sup>1</sup></b>	<b>Mac OS X v10.5<sup>2</sup></b>	<b>Mac OS X v10.4<sup>3</sup></b>
<b>Driver / Applications<sup>4,5</sup></b>	ScanSnap Manager V3.2	Supported	Supported	Supported	Supported
	Cardiris™ 4.0 for ScanSnap	Supported	Supported	Supported	Supported
	ABBYY FineReader for ScanSnap™ 4.1	Supported	Supported	Supported	Supported
	Evernote for Mac 2.2	Supported	Supported	Supported <sup>10</sup>	Not Supported
	Adobe® Acrobat® 9 Professional <sup>6</sup>	Not Supported <sup>7</sup>	Not Supported <sup>7</sup>	Supported <sup>9</sup>	Supported <sup>8</sup>
<b>Hardware requirements</b>	CPU <sup>11</sup>	Intel® Core™ 2 Duo (recommended: Intel® Core™ 2 Duo 2.4 GHz or higher)	Intel® Core™ Duo 1.83GHz or higher (recommended: Intel® Core™ 2 Duo 2.4GHz or higher)	Intel® Core™ Duo 1.83GHz or higher (recommended: Intel® Core™ 2 Duo 2.4GHz or higher) Power PC G5 1.6GHz or higher	
	Memory capacity <sup>11</sup>	2 GB or more	1 GB or more	512 MB or more (recommended : 1 GB or more)	
	Display	1024 x 768 pixels or more			
	Disk capacity	3,095 MB free hard disc space for installation			
	DVD-ROM drive	Required for installation			
	USB port <sup>11</sup>	USB 2.0 / USB 1.1			

- <sup>1</sup> Mac OS X v10.6.6 or later recommended.
  - <sup>2</sup> Mac OS X v10.5.8 recommended.
  - <sup>3</sup> Mac OS X v10.4.11 recommended.
  - <sup>4</sup> This product supports Mac operating systems.
  - <sup>5</sup> Please refer to the ScanSnap Web site for latest support information.
  - <sup>6</sup> Requires Safari 3.0.4 or later.
  - <sup>7</sup> The version of Adobe® Acrobat® 9 Pro must be compatible with Mac OS X v10.6 and v10.7 to run on those systems. For more information, refer to the Adobe Systems Incorporated Web site.
  - <sup>8</sup> It is recommended that this scanner be used with Mac OS X v10.5, which has been uploaded with the latest updates.
  - <sup>9</sup> Requires Mac OS X v10.4.11.
  - <sup>10</sup> Mac OS X v10.5.8 only.
  - <sup>11</sup> Scanning speeds may drop if recommended CPU, memory capacity and USB 1.1 requirements are not met.
- System requirements may change depending on the duration of support and the support policy of the companies that make the software listed in the table above.

<b>Consumables and Options</b>	<b>Part number</b>	<b>Remarks</b>
<b>Consumable Kit</b>	CON-3586-013A	Includes: 1 x Pick Roller, 2 x Pad Assembly
<b>Cleaning Kit</b>	SC-CLE-SS	24 x Cleaning Fluid Impregnated Cleaning Wipes

<b>Included items</b>	USB cable (2.0m), AC adapter, AC cable, ScanSnap Carrier Sheet, Adobe® Acrobat® DVD-ROM Set, Getting Started, Safety Precautions and Set-up DVD-ROM
-----------------------	---

All names, manufacturer names, brand and product designations are subject to special trademark rights and are manufacturer's trademarks and/or registered brands of their respective owners. All indications are non-binding. Technical data is subject to change without prior notification. Apple iPad, iPhone, iPod touch and iTunes are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc.



**PFU Imaging Solutions Europe Limited**  
 Hayes Park Central  
 Hayes End Road, Hayes  
 Middlesex UB4 8FE  
 England  
 Tel: (+44-(0)20) 8573 4444  
 Fax: (+44-(0)20) 8573 2643

**PFU Imaging Solutions GmbH**  
 Frankfurter Ring 211  
 80807 Munich  
 Germany  
 Tel: (+49-(0)89) 32378-0  
 Fax: (+49-(0)89) 32378-100

**PFU Imaging Solutions S.p.A.**  
 Via Nazario Sauro, 38  
 20099 Sesto San Giovanni (MI)  
 Italy  
 Tel: (+39) 0226294.1  
 Fax: (+39) 0226294.201

[www.ScanSnapit.com](http://www.ScanSnapit.com)

